

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

(11)

**EP 1 197 015 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
18.08.2004 Bulletin 2004/34

(51) Int Cl. 7: **H04B 10/17, H04J 14/08,  
H04L 7/00**

(21) Application number: **00946188.3**

(86) International application number:  
**PCT/GB2000/002780**

(22) Date of filing: **18.07.2000**

(87) International publication number:  
**WO 2001/006332 (01.02.2001 Gazette 2001/05)**

(54) **OPTICAL REGENERATOR FOR HIGH BIT-RATE OTDM SIGNALS**

OPTISCHER REGENERATOR FÜR HOCHBITRATIGE ZEITMULTIPLEXIERTE SIGNALE  
REGENERATEUR OPTIQUE POUR SIGNAUX DE MULTIPLEXAGE TEMPOREL OPTIQUE A  
DEBIT BINAIRE ELEVE

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**

(56) References cited:  
**US-A- 5 798 852**

(30) Priority: **23.07.1999 EP 99205834**

(43) Date of publication of application:  
**17.04.2002 Bulletin 2002/16**

(73) Proprietor: **BRITISH TELECOMMUNICATIONS  
public limited company  
London EC1A 7AJ (GB)**

(72) Inventor: **COTTER, David  
Woodbridge, Suffolk IP12 4JN (GB)**

(74) Representative: **Roberts, Simon Christopher et al  
BT Group Legal  
Intellectual Property Department,  
PP CSA  
BT Centre  
81 Newgate Street  
London, EC1A 7AJ (GB)**

- **BIGO S ET AL: "DUAL-CONTROL  
NONLINEAR-OPTICAL LOOP MIRRORS FOR  
ALL-OPTICAL SOLITON SYNCHRONOUS  
MODULATION" OPTICS LETTERS,US,OPTICAL  
SOCIETY OF AMERICA, WASHINGTON, vol. 21,  
no. 18, page 1463-1465 XP000830829 ISSN:  
0146-9592**
- **COTTER D ET AL: "ASYNCHRONOUS DIGITAL  
OPTICAL REGENERATION AND NETWORKS"  
JOURNAL OF LIGHTWAVE  
TECHNOLOGY,US,IEEE, NEW YORK, vol. 16, no.  
12, page 2088-2080 XP000833954 ISSN:  
0733-8724**
- **GUNNING P ET AL: "10 Gbit/s asynchronous  
digital optical regenerator" OPTICAL FIBER  
COMMUNICATION CONFERENCE OFC/NOOC  
'99, TECHNICAL DIGEST, vol. 1, 21 - 26 February  
1999, pages 134-138, XP002127915**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 197 015 B1

2

## Description

[0001] The present invention relates to an optical regenerator suitable for use with optical time division multiplexed (OTDM) signals carried on an optical network. The signals may be, for example, optical packets or a circuit switched data stream.

[0002] In order to use fully the bandwidth available on optical communications networks, it is desirable to transmit time division multiplexed signals at a very high bit rate of tens or hundreds of Gbits per second. However, the very short duration pulses making up such signals soon suffer degradation in shape, timing and signal-to-noise ratio resulting, for example, from noise in optical amplifiers, dispersion in the optical transmission medium and/or from the effects of processing at nodes traversed by the packet. Therefore, if the extent of the optical network is not to be undesirably limited, it is necessary to use an optical regenerator to restore the timing and shape of the pulse train making up the optical signals. Ideally, the regenerator will function as a "3R" regenerator, that is it will re-amplify, re-time and re-shape the pulses. Examples of suitable optical regenerators are described in Lucak J and Smith K, *Optics Letters*, 18, 1228-28 (1993), and in Phillips ID, Ellis A D, Thiele H J, Manning R J and Kelly A E, *Electronics Letters*, 34, 2340-2342 (1998). The use of such techniques makes it possible to maintain the integrity of the optical data signals as they pass through a very large number of nodes. For example, Thiele H J, Ellis A D and Phillips ID, *Electronics Letters*, 35, 230-231 (1999) describe cascaded 40 Gbit/s 3R data regeneration in a recirculating loop. With a regenerator spacing of 100 km, the error-free transmission distance in the loop is extended by an order of magnitude, from 200 km to greater than 2000 km. Regenerators made from semiconductor non-linear optical devices, rather than fibre non-linear optical devices, are preferred because they are compact, stable, easily integrated, and operate at relatively low pulse energy.

[0003] Typically, an optical regenerator comprises an optical gate having a first optical input that receives an optical clock signal at the data line rate, and a second optical input, the control input that receives the data signal that is to be regenerated. Typically the gate, which includes a non-linear optical element, changes to a transmissive state when a binary digit '1' occurs in the optical control signal that is applied, and reverts to the original non-transmissive state after a certain fixed time known as the gate window. The state of the gate is unchanged if a binary digit '0' occurs in the optical control signal. The state of the non-linear element then determines whether a given pulse in the optical clock train at the input to the gate is passed on to the output from the gate. In this way, the bit pattern in the input data stream is imposed on the optical clock train and output to form a regenerated optical data stream. However, while experiments reported in Kelly A E et al, *Electronics Letters*,

(in press, July 1999) have shown that semiconductor-based all-optical regenerators can function at bit rates as high as 80 Gbit/s it has been found that they are unable to perform satisfactorily at still higher bit rates, since then in general the bit period is very much less than the recovery time of the optical gate, so that the regenerated signals contain patterning effects which lead to bit errors.

[0004] Cotter, D and Ellis, A E., *Journal of Lightwave Technology*, Vol. 18, No. 12, December 1998, pages 2068-2080 "Asynchronous Digital Optical Regeneration and Networks", describe a quad-gate asynchronous optical burst regenerator for an asynchronous digital photonic network in which the incoming signal data bits control the operation of all of the gates of the regenerator simultaneously, and in which the output from a local clock applies relative delays to the inputs of each of the four gates.

[0005] According to a first aspect of the present invention, there is provided an optical regenerator comprising: a data division stage arranged to receive an incoming optical data stream having a bit rate; and a regeneration stage, the optical regenerator being characterised over the above Cotter and Ellis reference by the data division stage being arranged to divide the incoming optical data stream into a plurality of further optical data streams each having a lower bit rate than the bit rate of the incoming data stream and the regeneration stage including a plurality of optical gate means each arranged to receive a respective one of the further data streams at its control input and to receive at another input an optical clock stream at the frequency of the bit rate of the further data streams or a multiple thereof, wherein the outputs of the gate means are connected in common to an optical output of the regenerator and are arranged to provide a bit-interleaved regenerated optical data stream at the said output.

[0006] The present invention provides an all-optical generator that is able to function at far higher bit rates than existing designs. For example, using current technologies, an all-optical regenerator functioning at 160 Gbit/s can be constructed. The present inventors have realised that although the functioning of an optical regenerator is limited by the recovery time of the optical gate, the impact of that recovery time is different for a regular clock signal, as opposed to a signal comprising a random data sequence. Accordingly, a gate that may be able to function effectively as a regenerator for data signals only up to 80 Gbit/s can nonetheless function as a demultiplexer for data signals at twice that bit rate. The regenerator of the present invention takes advantage of this difference to provide a system capable of operating at far higher bit rates. This is achieved by first dividing down the higher bit rate data stream into a number of parallel data streams at a lower bit rate and then applying these different divided data streams at the lower bit rate as control signals to a number of gates, each of which is receiving a clock signal at the frequency of the

3

EP 1 197 015 B1

4

lower bit rate or a multiple thereof at its input. Then when the outputs of the different gates are interleaved, the result is a regenerated data stream at the higher bit rate.

[0007] Preferably the data division stage comprises a plurality of gate means each arranged to receive the data stream at a respective driving input and a clock stream at the frequency of the lower bit rate at a respective control input and delay means arranged to impose a different respective delay on the clock signal at the frequency of the lower bit rate relative to the higher bit rate data signal for each of the respective gate means.

[0008] The all-optical regenerator may be arranged to function in a bit-synchronous network, in which case it may receive clock signals from local clock sources that are synchronised to a bit-level clock. In such a system, each of the gate means may comprise a single optical gate, for example using a TOAD (terahertz optical asymmetrical demultiplexer) structure.

[0009] Alternatively, the optical regenerator may be used in a network which functions asynchronously at the bit-level. In this case, the optical regenerator may incorporate the regenerator structures described and claimed in the present applicant's co-pending application, with publication number WO99/56038. In this case, each of the gate means in the regeneration stage may comprise an array of optical gates, and delay means arranged to impose a different respective delay in the clock stream relative to the data stream at each of the array of optical gates, and an optical switch connected to the outputs of all of the array of optical gates, and arranged selectively to output the optical data stream from one of the gates of the array. Alternatively, as described in our co-pending application, a single gate means may be used in conjunction with means to shift the phase of the incoming packet to match that of a local free-running optical clock source.

[0010] According to a second aspect of the present invention, there is provided a method of regenerating an optical data signal comprising: (a) dividing an incoming optical data signal at a bit rate into a plurality of further data streams each having a lower bit rate than the bit rate of the incoming optical signal;

(b) gating under the control of the plurality of further data streams a clock signal at the frequency of the lower bit rate or a multiple thereof; and

(c) interleaving the optical signals produced by step (b) thereby creating a re-generated optical signal at the bit rate of the incoming optical data signal.

[0011] Systems embodying the present invention will now be described in further detail by way of example only, with reference to the accompanying drawings in which:

Figure 1 is a schematic of an optical regenerator embodying the invention;

Figure 2 is a diagram showing an optical gate suitable for use in the regenerator in Figure 1;

Figure 3 is a diagram showing a gate array for use

in the regenerating stage of an asynchronous optical regenerator embodying the invention.

[0012] An optical regenerator comprises an optical data division stage 1 and an optical regeneration stage 2. An optical time division multiplexed (OTDM) data stream at a high bit rate, in this example 180Gbit/s, is received at an optical input 3 of the data division stage 1. Divided data streams at a lower bit rate, in this example 80Gbit/s are passed from optical outputs 4a, 4b of the data division stage 1 into the optical regeneration stage 2. The data streams are used to gate an optical clock signal at the frequency of the lower bit rate or a multiple thereof, in this example 80 GHz, so as to produce at the optical output 5 of the regeneration stage 2 a regenerated high bit-rate optical data stream.

[0013] In a regenerator for use with a synchronous data stream, the data division and regeneration stages require in total  $2n$  optical gates where  $n$  is the ratio between the bit rate of the optical data stream and the lower bit rate of the divided data streams input to the regeneration stage 2. In the present example,  $n=2$  and there are two optical gates in the division stage 1 and a further two optical gates in the regeneration stage 2. As shown in Figure 1, each of the two gates in the division stage 1 is connected in common to the optical input 3 and is driven by the 180Gbit/s optical pulse stream. An optical clock signal at the lower bit rate of 80GHz is applied to each of the optical gates 6, 7. An optical delay 8 is included between the optical feeds to the gates 6, 7. The magnitude of the optical delay is said to be equal to the separation between successive bits in the optical data stream at the input 3. As a result, the two optical gates 6, 7 each pass every other bit of the input data stream with, for example, gate 6 passing the optical pulses in bit positions 0, 2, 4 ... and the other gate 7 passing the optical pulses in bit positions 1, 3, 5... The resulting divided data streams at the lower bit rate are passed to the optical outputs 4a, 4b of the data division stage 1. In the regeneration stage 2, a further pair of optical gates 9, 10 are driven by the 80GHz optical clock signal. A respective one of the divided data signals is applied as a control signal to each of the gates 9, 10. An optical delay 11 is included in the output from one of the gates 9, 10 and is arranged to impose a relative delay between the outputs of the gates 9, 10 that is complementary to the delay imposed in the data division stage 1. The outputs of the gates 9, 10 are then combined by an optical coupler 12. In this way, the two lower bit rate data streams are modulated onto the higher bit rate clock and interleaved to produce an output signal at 180Gbit/s that is regenerated in shape, amplitude and timing, that is it has undergone 3R regeneration.

[0014] Figure 2 shows one possible construction for an optical gate for use in the circuit of Figure 1. In this case, the gate uses a TOAD configuration. A fibre loop mirror 21 includes a non-linear element 22 which may be, for example, an optical semiconductor amplifier. The

non-linear element 22 is offset with respect to the centre of the loop mirror. The duration of the switching window is determined by the extent of the offset. A gating control signal is applied to the loop via an optical coupler 23.

[0015] Fibre loop mirrors in which the fibre itself acts as the non-linear element are described, for example, in Whittaker et al, Optical Letters, vol. 18, page 1840 (1991). The use of non-linearities in semiconductor optical amplifiers as an ultrafast gating device is described, for example, by Kang et al in the International Journal of High Speed Electronics and Systems, vol. 7, page 125 (1996). As an alternative to the use of a semiconductor optical amplifier in a loop configuration as shown in Figure 2, an optical gate may use a pair of amplifiers in a Mach-Zehnder interferometer configuration. Another ultrafast optical gate is the ultrafast non-linear interferometer switch described by Hall and Rauschenbach (Paper BD5, Proceedings of Conference on Optical Fibre Communications (OFC 98) Optical Society of America, February 1998). It is characteristic of all these devices, that they suffer significant speed limitations as a result of the recovery time of the non-linear element when the gate is driven by an irregular data signal. However, they can function at considerably higher data rates when driven by a regular clock signal.

[0016] To generate the clock signals at and the frequency of the lower bit rate, a clock recovery circuit may be used to derive a clock signal in synchronism with the incoming data bits and this clock signal may be used to synchronise a local pulse source running at 80GHz. For example, the clock recovery circuit may comprise a passive pulse replication network that replicates a marker pulse to produce a regular pulse pattern.

[0017] In an alternative embodiment, the optical regenerator is arranged to handle incoming optical packets that are asynchronous at the bit-level. In this case, each of the single optical gates 9, 10 in the regenerative stage of Figure 1 is replaced by an array of gates. One such array is shown in Figure 3. The array comprises four optical gates 31, 32, 33, 34. Each of the gates is driven by the 160Gbit/s data stream. Different relative delays of a fraction of a bit period are included in the input paths for the driving signals. This delay has a value of 0 for the input to the first optical gate 31  $\pi/4$  for the second optical gate 32,  $\pi/2$  for the third optical gate 33, and  $3\pi/4$  for the final optical gate 34. The outputs from the four optical gates are passed to a 4:1 optical switch which selects the data stream from one of the gates to be passed to the respective optical output 4a, 4b. The appropriately synchronised output may be selected, for example, by tapping off a fraction of the output from the switch C and measuring, for example using a photo detector, the optical energy in the data signal each of the different gates is selected. When the phase error between the clock signal and driving data signal is minimised, then the corresponding gate output will give a peak in the energy function. Electronic control logic may be used to generate an electronic control signal for the

4:1 switch. The lower switching rates of electronic control logic is not a limiting factor, since the selection of an optical output from the gate array only needs to be repeated at the packet rate. In such systems handling bit asynchronous optical packets, the optical clock signals may be derived from free-running optical pulse sources. A suitable source comprises an electronic microwave oscillator driving an electrically synchronised laser, such as a gain-switched laser or an actively mode-locked laser. Alternatively, a continuously free-running optical pulse source such as a passively mode-locked laser may be used. In general, an asynchronous optical regenerator will require  $5n$  gates, where  $n$  is the ratio between the higher bit rate and the lower bit rate.

[0018] Figure 4 shows, by way of example, an optical network in which a node includes a bit-asynchronous regenerator embodying the invention. Packets arrive at the node referenced B from a number of sources, each of which have independent, uncorrelated clocks. By suitable adjustment of the transmitted power at the source, the power levels in any optical amplifiers used in the link, and also the power levels at any synchronous regenerators used in the link, the bits in the packets arriving at the input of a routing node may conveniently have an intensity at an appropriately-defined standard 'digital' level (e.g. of the correct intensity to perform complete switching in the optical gate or gates used in the bit-asynchronous packet regenerator AR in the switching node). The inputs to the switching nodes will, in general, be bit-asynchronous. Each input to a routing node may pass through a bit-asynchronous packet regenerator AR, constructed as described above. As is shown schematically in Figure 4 a node, such as that referenced node B, may combine an add/drop function for local traffic as well as regenerating packets for onward transmission.

#### Claims

##### 1. An optical regenerator comprising:

- (a) a data division stage (1) arranged to receive an incoming optical data stream having a bit rate; and
- (b) a regeneration stage (2), the optical regenerator being characterised by:

the data division stage (1) being arranged to divide the incoming optical data stream into a plurality of further optical data streams each having a lower bit rate than the bit rate of the incoming data stream and the regeneration stage (2) including a plurality of optical gate means (9,10) each arranged to receive a respective one of the further data streams at its control input and to receive at another input an optical clock stream at the frequency of the bit rate of the further data streams or a multiple

7

EP 1 197 015 B1

8

thereof, wherein the outputs of the gate means are connected in common to an optical output (6) of the regenerator and are arranged to provide a bit-interleaved regenerated optical data stream at the said output (5).

2. A regenerator according to Claim 1, in which the data division stage (2) includes:

a plurality of optical gate means (9,10) each arranged to receive the incoming data stream at a respective data input and to receive at a respective control input an optical clock stream at the frequency of the bit rate of the further data streams; and  
delay means arranged to impose a different respective delay (11) on the said optical clock stream relative to the incoming data signal for each of the respective gate means.

3. A regenerator according to claims 1 or 2, in which the regenerator is arranged to regenerate a received bit-asynchronous optical packet, and in which each of the gate means (9,10) of the regeneration stage includes:

an array of optical gates (31-34);  
means for imposing different respective delays between the clock signal and the data signal at each of the gates making up the array; and  
switch means for selecting an optical output from one of the gates in the array depending on the bit-level phase of the received optical packet.

4. A method of regenerating an optical data signal including the steps of:

(a) dividing an incoming optical data signal at a bit rate into a plurality of further data streams each having a lower bit rate than the bit rate of the incoming optical signal;  
(b) gating under the control of the plurality of further data streams a clock signal at the frequency of the lower bit rate or a multiple thereof; and  
(c) interleaving the optical signals produced by step (b) thereby creating a re-generated optical signal at the bit rate of the incoming optical data signal.

5. A method according to claim 4, in which the step of dividing the optical data signal includes:

applying the optical data signal to a respective input of each of a plurality of gate means;  
applying to a respective control input of each of the plurality of gate means an optical clock

stream at the frequency of the bit rate of the further signals or a multiple thereof; and  
imposing a different respective delay relative to the higher bit rate data signal on each of the said optical clock streams.

6. A method according to claim 4 or 5, in which the step of gating the clock signal includes:

applying each of the said data streams to an array of optical gates (31-34); imposing different respective delays between the clock signal and the data signal at each of the gates making up an array; and  
selecting an optical output from one of the plurality of gates in each array depending on the bit-level phase of a received bit-asynchronous optical data signal.

7. A node for connection in an optical network and including a regenerator according to any one of claims 1 to 3.

8. A node as claimed in claim 7, further including an add/drop function for local traffic of the network.

9. An optical network including a node according to claims 7 or 8.

10. A regenerator arranged to implement a method of regenerating an optical data signal according to claim 4, the regenerator including:

(a) means to divide an incoming optical data signal at a bit rate into a plurality of further data streams each having a lower bit rate than the bit rate of the incoming optical signal;  
(b) means to gate under the control of the plurality of further data streams a clock signal at the frequency of the lower bit rate or a multiple thereof; and  
(c) means to interleave the optical signals produced by means (b) thereby creating a re-generated optical signal at the bit rate of the incoming optical data signal.

11. A regenerator as claimed in any one of claims 1 to 3, or 10, in which the incoming optical data stream has a bit rate of 160 Gbits<sup>-1</sup>.

12. A method as claimed in any one of claims 4 to 6, in which the incoming optical data stream has a bit rate of 160 Gbits<sup>-1</sup>.

13. A node as claimed in claims 7 or 8, in which the incoming optical data stream has a bit rate of 160 Gbits<sup>-1</sup>.

14. A network as claimed in claim 8, in which the incoming optical data stream has a bit rate of 160 Gbits/s.

#### Patentansprüche

#### 1. Optischer Regenerator mit:

(a) einer Datenaufteilungsstufe (1), die dazu eingerichtet ist, einen ankommenden optischen Datenstrom mit einer Bitrate zu empfangen; und

(b) einer Regenerationsstufe (2),

wobei der optische Regenerator dadurch gekennzeichnet ist, dass

die Datenaufteilungsstufe (1) dazu eingerichtet ist, den ankommenden optischen Datenstrom in mehrere weitere optische Datenströme aufzuteilen, von denen jeder eine geringere Bitrate als die Bitrate des ankommenden Datenstroms aufweist, und die Regenerationsstufe (2) mehrere optische Durchlasseneinrichtungen (9, 10) enthält, die dazu eingerichtet sind, einen jeweiligen der weiteren Datenströme an ihrem Steuereingang zu empfangen und an einem anderen Eingang einen Strom von optischen Taktsignalen mit der Bitrate der weiteren Datenströme oder einem Vielfachen davon zu empfangen, wobei die Ausgänge der Durchlasseneinrichtung gemeinsam an einen optischen Ausgang (5) des Regenerators angeschlossen sind, und dazu eingerichtet sind, einen bit-verschachtelten regenerierten optischen Datenstrom an dem Ausgang (5) bereitzustellen.

#### 2. Regenerator nach Anspruch 1, bei dem die Datenaufteilungsstufe (2) folgendes enthält:

mehrere optische Durchlasseneinrichtungen (9, 10), die jede dazu eingerichtet sind, den ankommenden Datenstrom an einem jeweiligen Dateneingang und an einem jeweiligen Steuereingang einen Strom von optischen Taktsignalen mit der Frequenz der Bitrate der weiteren Datenströme zu empfangen; und

eine Verzögerungseinrichtung, die dazu eingerichtet ist, eine verschiedene jeweilige Verzögerung (11) bezüglich des ankommenden Datensignals für jede der jeweiligen Durchlasseneinrichtungen in den Strom von optischen Taktsignalen einzubringen.

#### 3. Regenerator nach Anspruch 1 oder 2, wobei der Regenerator dazu eingerichtet ist, ein empfangenes bit-asynchrones optisches Paket zu regenerieren, und bei dem jede der Durchlasseneinrichtungen

(9, 10) der Regenerationsstufe folgendes enthält:

ein Feld optischer Durchgänge (31-34);

eine Einrichtung zum Einbringen verschiedener jeweiliger Verzögerungen zwischen dem Taktsignal und dem Datensignal an jedem der Durchgänge, die das Feld bilden; und

eine Schalteinrichtung zum Auswählen eines optischen Ausgangssignals aus einem der Durchgänge in dem Feld in Abhängigkeit der Phase auf Bit-Ebene des empfangenen optischen Paketes.

#### 4. Verfahren zum Regenerieren eines optischen Datensignals, das die folgenden Schritte umfasst:

(a) Aufteilen eines ankommenden optischen Datensignals mit einer Bitrate in mehrere weitere Datenströme, die jeder eine geringere Bitrate als die Bitrate des ankommenden optischen Signals haben;

(b) Durchlassen eines Taktsignals mit der Frequenz der geringeren Bitrate oder einem Vielfachen davon unter der Steuerung der mehreren weiteren Datenströme; und

(c) Verschachteln der optischen Signale, die von dem Schritt (b) erzeugt wurden, wodurch ein regeneriertes Signal mit der Bitrate des ankommenden optischen Datensignals erzeugt wird.

#### 5. Verfahren nach Anspruch 4, bei dem der Schritt der Aufteilung des optischen Datensignals folgendes enthält:

Anlegen des optischen Datensignals an einen jeweiligen Eingang von jeder von mehreren Durchlasseneinrichtungen;

Anlegen eines Stroms von optischen Taktsignalen mit der Frequenz der Bitrate der weiteren Signale oder einem Vielfachen davon an einen jeweiligen Steuereingang von jeder der mehreren Durchlasseneinrichtungen; und

Einbringen einer verschiedenen jeweiligen Verzögerung bezüglich dem Datensignal mit hoher Bitrate in jeden der von optischen Taktsignalen.

#### 6. Verfahren nach Anspruch 4 oder 5, bei dem der Schritt des Durchlassens des Taktsignals folgendes umfasst:

Anlegen der Datenströme an ein Feld von op-

11

EP 1 197 015 B1

12

tlischen Durchgängen (31-34);

Einbringen verschiedener jeweiliger Verzögerungen zwischen dem Taktsignal und dem Datensignal an jedem der Durchgänge, die ein Feld bilden; und

Auswählen eines optischen Ausgangssignals aus einem der mehreren Durchgänge in jedem Feld in Abhängigkeit der Phase auf Bit-Ebene eines empfangenen bit-asynchronen optischen Datensignals.

7. Verbindungsknoten in einem optischen Netzwerk, der einen Regenerator nach einem der Ansprüche 1 bis 3 enthält.
8. Knoten nach Anspruch 7, der weiter eine Hinzufügen/Weglassen-Funktion für den lokalen Verkehr auf dem Netzwerk enthält
9. Optisches Netzwerk mit einem Knoten nach Anspruch 7 oder 8.
10. Regenerator, der dazu eingerichtet ist, ein Verfahren zur Regeneration eines optischen Datensignals nach Anspruch 4 zu implementieren, wobei der Regenerator folgendes enthält:
  - (a) eine Einrichtung zum Aufteilen eines ankommenden optischen Datensignals mit einer Bitrate in mehrere weitere Datenströme, von denen jeder eine geringere Bitrate als die Bitrate des ankommenden optischen Signals hat;
  - (b) eine Einrichtung zum Durchlassen eines Taktsignals mit der Frequenz der geringeren Bitrate oder einem Vielfachen davon unter der Steuerung der mehreren weiteren Datenströme; und
  - (c) eine Einrichtung zum Verschachteln der optischen Signale, die von der Einrichtung (b) erzeugt wurden, wodurch ein regeneriertes optisches Signal mit der Bitrate des ankommenden optischen Datensignals erzeugt wird.
11. Regenerator nach einem der Ansprüche 1 bis 3 oder 10, bei dem der ankommende optische Datenstrom eine Bitrate von 160 Gbits<sup>-1</sup> hat.
12. Verfahren nach einem der Ansprüche 4 bis 6, bei dem der ankommende optische Datenstrom eine Bitrate von 160 Gbits<sup>-1</sup> hat.
13. Knoten nach Anspruch 7 oder 8, bei dem der ankommende optische Datenstrom eine Bitrate von 160 Gbits<sup>-1</sup> hat.

14. Netzwerk nach Anspruch 9, bei dem der ankommende optische Datenstrom eine Bitrate von 160 Gbits<sup>-1</sup> hat.

# Revendications

1. Régénérateur optique comprenant :

- (a) un étage de division de données (1) agencé pour recevoir un flux de données optiques entrant présentant un rythme binaire, et
- (b) un étage de régénération (2),

le régénérateur optique étant caractérisé en ce que :

l'étage de division de données (1) est agencé pour diviser le flux de données optiques entrant en une pluralité d'autres flux de données optiques ayant chacun un rythme binaire inférieur au rythme binaire du flux de données entrant et l'étage de régénération (2) comprend une pluralité de moyens de portes optiques (9, 10), chacune étant agencée pour recevoir un flux respectif parmi les autres flux de données à son entrée de commande et pour recevoir à une autre entrée un flux d'horloge optique à la fréquence du rythme binaire des autres flux de données ou à un multiple de celui-ci, où les sorties des moyens de portes sont reliées en commun à une sortie optique (5) du régénérateur, et sont agencées pour procurer un flux de données optiques régénérées à bits entrelacés à ladite sortie (5).

2. Régénérateur selon la revendication 1, dans lequel l'étage de division de données (2) comprend :

une pluralité de moyens de portes optiques (9, 10) agencés chacun pour recevoir le flux de données entrant à une entrée de données respective et pour recevoir à une entrée de commande respective un flux d'horloge optique à la fréquence du rythme binaire des autres flux de données, et un moyen à retard agencé pour appliquer un retard respectif différent (11) sur ledit flux d'horloge optique par rapport au signal de données entrant pour chacun des moyens de portes respectifs.

3. Régénérateur selon les revendications 1 ou 2, dans lequel le régénérateur est agencé pour régénérer un paquet optique à bits asynchrones reçu, et dans lequel chacun des moyens de portes (9, 10) de l'étage de régénération comprend :


13

EP 1 197 015 B1

14


- un réseau de portes optiques (31 à 34),  
un moyen destiné à appliquer des retards res-  
pectifs différents entre le signal d'horloge et le  
signal de données à chacune des portes cons-  
tituant le réseau, et  
un moyen de commutation destiné à sélection-  
ner une sortie optique à partir de l'une des por-  
tes du réseau suivant la phase du niveau bina-  
ire du paquet optique reçu.
4. Procédé de régénération d'un signal de données  
optiques comprenant les étapes consistant à :
- (a) diviser un signal de données optiques en-  
trant à un rythme binaire en une pluralité  
d'autres flux de données présentant chacun un  
rythme binaire inférieur au rythme binaire du si-  
gnal optique entrant,  
(b) sélectionner, sous la commande de la plu-  
ralité d'autres flux de données un signal d'hor-  
loge à la fréquence du rythme binaire inférieur  
ou à un multiple de celui-ci, et  
(c) entrelacer les signaux optiques produits par  
l'étape (b) en créant ainsi un signal optique ré-  
général au rythme binaire du signal de données  
optiques entrant.
5. Procédé selon la revendication 4, dans lequel l'éta-  
pe de division du signal de données optiques  
comprend :
- l'application d'un signal de données optiques à  
une entrée respective de chaque moyen d'une  
pluralité de moyens de portes,  
appliquer à une entrée de commande respec-  
tive de chaque moyen de la pluralité de moyens  
de portes un flux d'horloge optique à la fréquence  
du rythme binaire des autres signaux ou à  
un multiple de celui-ci, et  
appliquer un retard respectif différent par rap-  
port au signal de données à rythme binaire plus  
élevé sur chacun desdits flux d'horloge opti-  
ques.
6. Procédé selon la revendication 4 ou 5, dans lequel  
l'étape de sélection du signal d'horloge comprend :
- l'application de chacun desdits flux de données  
à un réseau de portes optiques (31 à 34), l'ap-  
plication de différents retards respectifs entre  
le signal d'horloge et le signal de données à  
chacune des portes constituant un réseau, et  
la sélection d'une sortie optique à partir d'une  
porte de la pluralité de portes dans chaque ré-  
seau suivant la phase de niveau binaire d'un  
signal de données optiques à bits asynchrones  
reçu.
7. Noeud destiné à une connexion dans un réseau op-  
tique et comprenant un régénérateur selon l'une  
quelconque des revendications 1 à 3.
8. Noeud selon la revendication 7, comprenant en  
outre une fonction d'addition/abandon pour un trafic  
local du réseau.
9. Réseau optique comprenant un noeud selon les re-  
vendications 7 ou 8.
10. Régénérateur agencé pour mettre en oeuvre un  
procédé de régénération d'un signal de données  
optiques selon la revendication 4, le régénérateur  
comportant :
- (a) un moyen destiné à diviser un signal de don-  
nées optiques entrant à un rythme binaire en  
une pluralité d'autres flux de données présen-  
tant chacun un rythme binaire inférieur au ryth-  
me binaire du signal optique entrant,  
(b) un moyen destiné à sélectionner sous la  
commande de la pluralité d'autres flux de don-  
nées un signal d'horloge à la fréquence du ryth-  
me binaire inférieur ou à un multiple de celui-  
ci, et  
(c) un moyen destiné à entrelacer les signaux  
optiques produits par le moyen (b) en créant  
ainsi un signal optique régénéré au rythme bi-  
naire du signal de données optiques entrant.
11. Régénérateur selon l'une quelconque des revendi-  
cations 1 à 3 ou 10, dans lequel le flux de données  
optiques entrant présente un rythme binaire de 160  
Gbits<sup>-1</sup>.
12. Procédé selon l'une quelconque des revendications  
4 à 6, dans lequel le flux de données optiques en-  
trant présente un rythme binaire de 160 Gbits<sup>-1</sup>.
13. Noeud selon les revendications 7 ou 8, dans lequel  
le flux de données optiques entrant présente un  
rythme binaire de 160 Gbits<sup>-1</sup>.
14. Réseau selon la revendication 9, dans lequel le flux  
de données optiques entrant présente un rythme bi-  
naire de 160 Gbits<sup>-1</sup>.

EP 1 197 015 B1

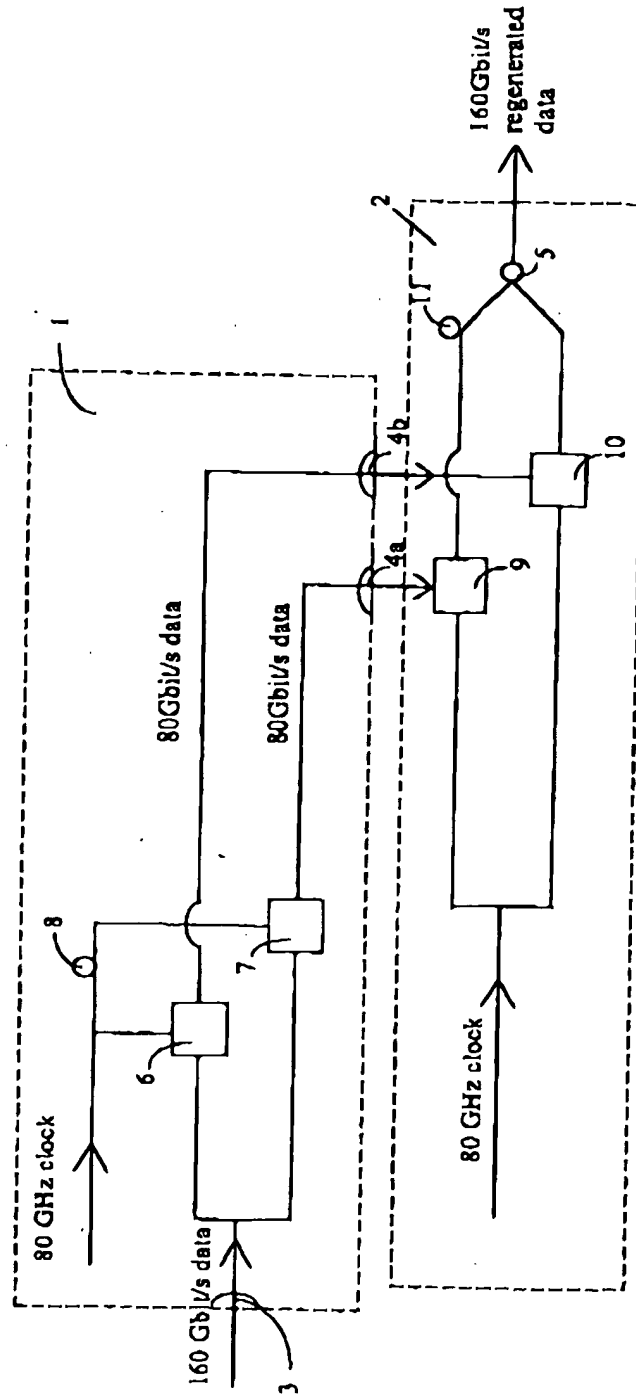
**Figure 1**

EP 1 197 015 B1

**Figure 2**

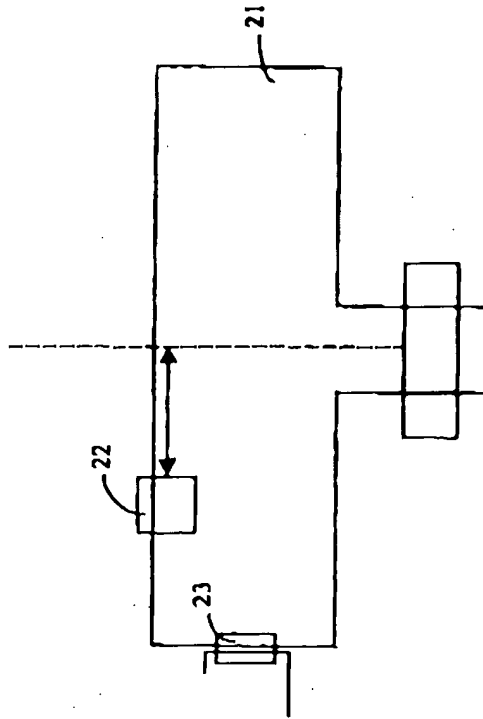

**EP 1 197 015 B1**

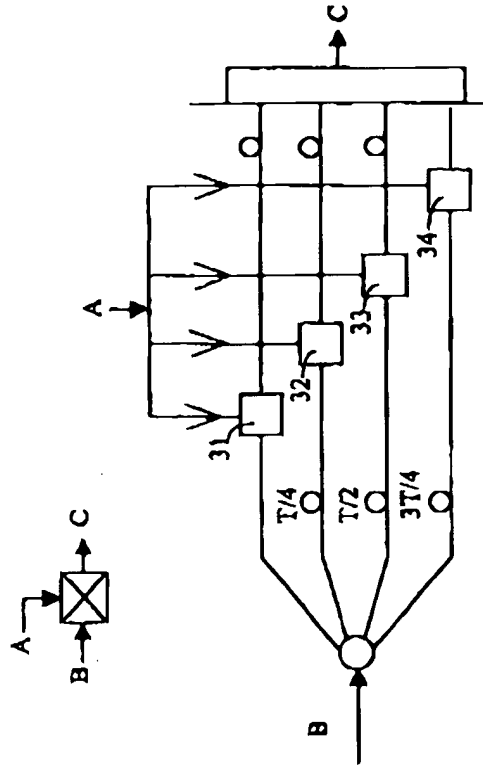

EP 1 197 015 B1

**Figure 4**